

DIGITAL, PROGRAMMABLE, PLUG & PLAY,
IGBT DRIVER
2IPSE1W17-60

FOR MEDIUM AND HIGH POWER IGBTs

D A T A S H E E T

InPower Systems GmbH


Am Kornfeld 11
D-86932 Pürgen, Germany
Tel: +49-(0)8196-93000
Fax: +49-(0)8196-930020
Email: info@inpower-sys.com
VAT-Id: DE 221021830

Prepared by: M. Wendt
Approved by: P. Kviz
Date of publication: July 2010
Revision: 1.2
Status: production


TECHNICAL DOCUMENTATION

1. MAIN FEATURES

- Dual channel for dual- and multilevel topology
- Smart switching with variable gate resistors
- Tuned according to the application
- Reliable protection against
 - over-current in all short circuit conditions
 - over-voltage during turn-off
- Advanced control and protection functions
 - desaturation monitoring
 - di/dt monitoring
 - feedback clamping with active function
 - multiple soft shut down
 - supply voltage monitoring
 - digital input filter for switching signals
- DC/DC converter included
- Cable connection for every type of IGBT module

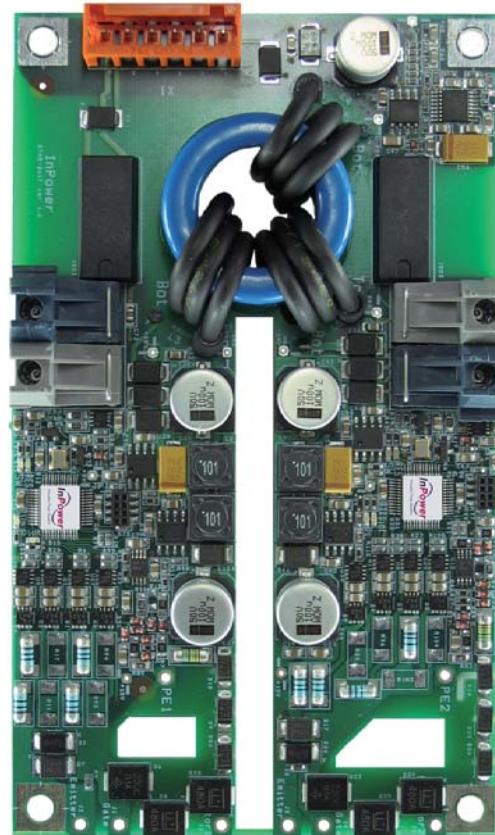

2. MECHANICAL DIMENSIONS

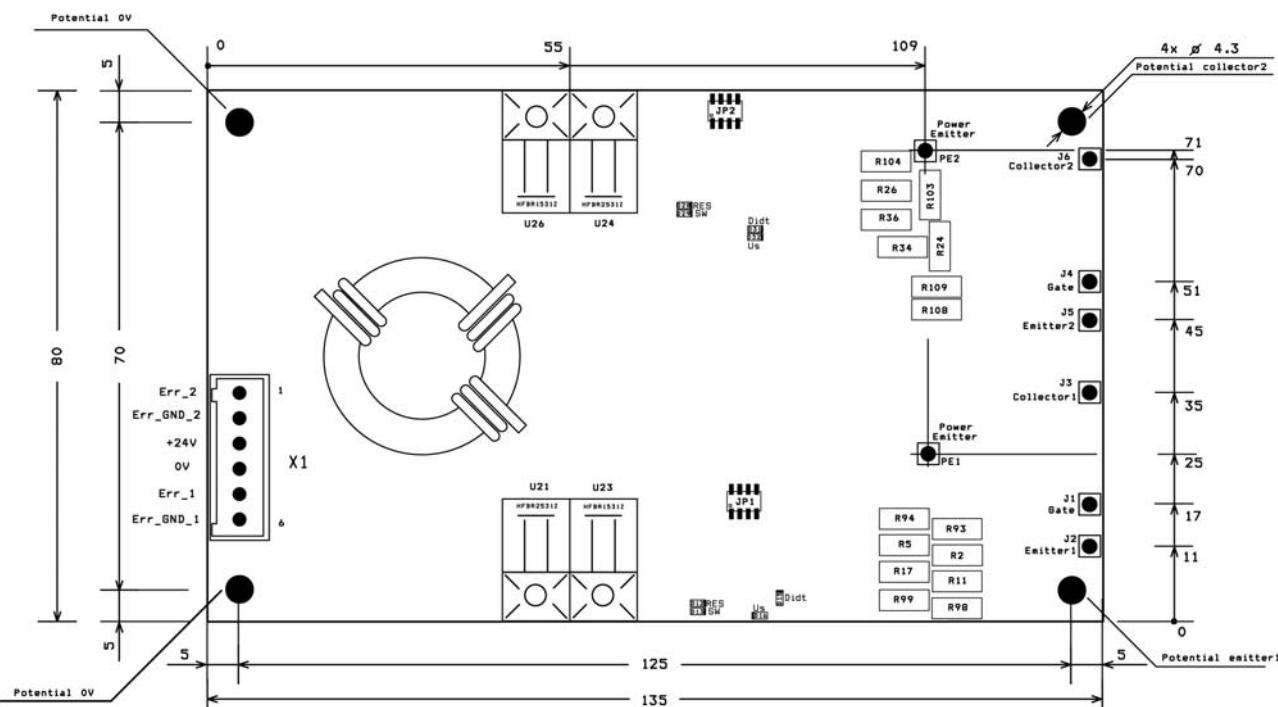

TECHNICAL DOCUMENTATION



3. KEY DATA

Parameter	Symbol	Value (at +25°C)
Max. collector-emitter voltage	V _{CE}	1700V
Input supply voltage range	V _{DC}	+14 to +30V
Output voltage: ON/OFF voltage	V _{ON/VOFF}	±15V
Isolation testing voltage (V _{AC} RMS 50Hz / 1 min)	V _{ISOL}	6000V
Switching frequency (max.)	f _{S max}	120kHz
Peak output current	I _G	±70A
Peak output power	P _{DC/DC}	3W
Quiescent current typically (at 15V)	I _{DC}	0.25A
Quiescent current typically (at 24V)	I _{DC}	0.16A
Max. input current at max. load (at 15V)	I _{DC max}	0.65A
Max. input current at max. load (at 24V)	I _{DC max}	0.52A
Coupling capacitance primary/secondary side (max.)	C _{io}	2pF
Switching frequency of isolated converter	f _{SMPC max}	0.5MHz
Creepage distance (primary-secondary side)		>16mm
Creepage distance (secondary LOW – secondary HIGH)		>16mm
Frequency of logic controller	f	20MHz
Operating temperature (measured on driver surface)	T _{OP}	-40 to +85°C
Storage temperature	T _{ST}	-40 to +85°C
Input driving and output error signal	optical	660nm
Turn-on delay time	t _{pdON}	400nsec
Turn-off delay time	t _{pdOFF}	400nsec
Typical time of soft shut down	t _{SSD}	1-2μsec
Max. system time between fault detection and error notification	t _{SYS}	100nsec
Time between detection of desaturation and gate voltage falling edge	t _{pDES}	300nsec

4. INTERFACES

Interface	Part Type	Remarks
Optical Receiver	HFBR-2531Z (Avago)	For suitable connectors see www.avagotech.com
Optical Transmitter	HFBR-1531Z (Avago)	
DC supply on PCB	FKC 2,5/2-STF-5,08 (Phoenix)	Connector: MSTBV 2,5/2-GF-5,08 (Phoenix)

5. CABLE LENGTH

Max. length of coaxial cable: 30cm. Max. length of simple cable: 7cm. For gate and auxiliary emitter connections use coaxial cable RG58 C/U with auxiliary emitter connected to the shielding. For power emitter and auxiliary collector it is recommended to use HV isolation cable, for instance Radox 9 GKW-AX, 1.5mm².